


(LUMN) APPLIQUE 12W LED
(CACU)
(TS) 12W LED (TOLU) 311

(CAP) CABOCHE PICCOLA LED PARETE
(IDNM) 2018000463 / Studio Oleandri
(PLA)

DIAGRAMMA POLARE (cd/klm)

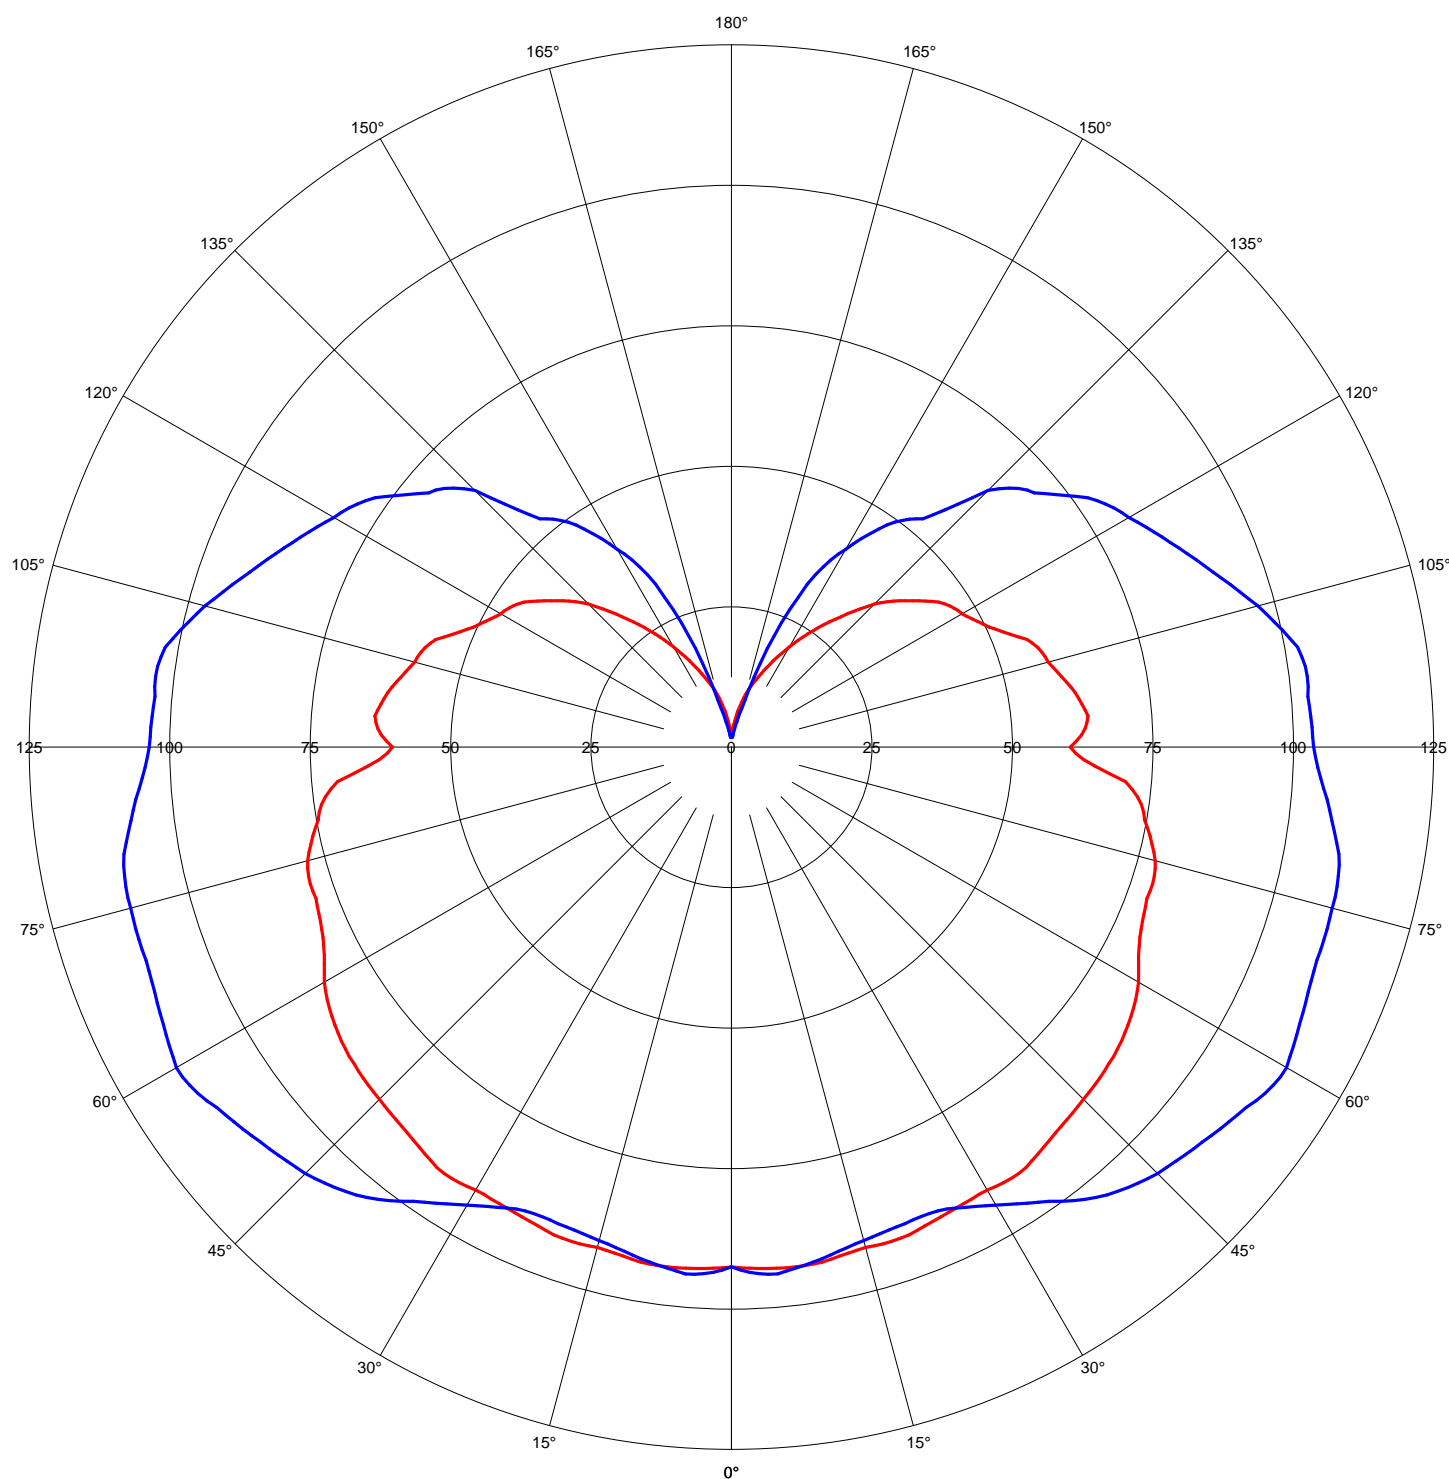

C = 0-180° 90-270°

Codice CIE: 24 49 74 61 100
Rendimento: LOR = 100,0; DLOR = 61,3; ULOR = 38,7
Apertura fascio: C0-180 = 116,0°; C90-270 = 86,0°
Asimmetria: IMax = 130,8 cd/klm; C = 45,0°; gamma = 80,0°
Orientamento: 0° - Inclinazione: 0° - Rotazione: 0°